

Performance Intercooler Pipe Kit Part Number: 17-135

Honda 2018-2022 Accord 2.0L Turbo

Installation Instructions

For technical inquiries please email us at tech@hpsperformanceproducts.com

In the email, please include the following information for faster response:

- Year / Make / Model / Engine of your vehicle.
- If it is a fitment issue, please include pictures showing the fitment problem.
- If there are missing parts, please list the part number from the bill of materials on the 2nd page.
- Optional but recommended Your contact phone number and preferred call back time.

You can also give us a call via 626-747-9200 for tech support Monday-Friday, 9:00am-5:00pm Pacific Time.

Bill of Materials

Kit Number: 17-135

Line	Description	Part#	Quantity
1	Charge Pipe	529-631	1
2	Hump 3-ply 225 L25	P3SHC-225-L25	2
3	Clamp - EMSC	EMSC-50-70	4

- Before installing any parts of this charge pipe system, please read the instructions thoroughly.
- Verify the contents of this charge pipe system before disassembling your vehicle.
- Report any defective or missing parts to HPS directly. The HPS dealer you purchased this product from might not have the replacement parts you need.
- Installation requires moderate mechanical skills. A qualified mechanic is highly recommended.
- Do not attempt to install the charge pipe system while the engine is hot.
- This installation may require removal of coolant lines that may be hot.
- For technical inquiries, please email us at tech@hpsperformanceproducts.com

PLEASE READ CAREFULLY BEFORE INSTALLATION!

This installation is not for the novice customer. Install this product with EXTREME caution! Misuse of this product can destroy your engine! If you are not mechanically inclined, please have a professional automotive mechanic install this kit.

NOTE: HPS holds no responsibility for any engine damage that results from misuse of this product.

GETTING STARTED


1. Turn the ignition OFF and disconnect the vehicle's negative battery cable. If the engine has run within the past two hours let it cool down.

NOTE: Disconnecting the negative battery cable erases pre-programmed electronic memories. Write down all memory settings before disconnecting the negative battery cable. Some radios will require an anti-theft code to be entered after the battery is reconnected. The anti-theft code is typically supplied with your owner's manual. In the event your vehicles' anti-theft code cannot be recovered, contact an authorized dealership to obtain your vehicles anti-theft code. We also highly recommend NOT discarding any stock parts after the installation.

2. Make sure there is enough space to access the underside of the vehicle. The use of a lift, jack stands, or race ramps may be required.



3. Loosen the 9 screws to remove the two pieces of aluminum undertray located under the vehicle.

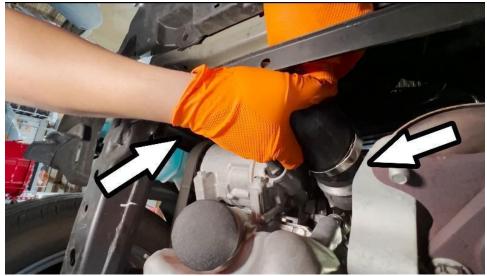

3. Locate the hot side intercooler hose located near the oil filter. Loosen the hose clamps securing the hot side charge hose from the turbo outlet and the intercooler. Remove the factory charge hose from the vehicle.



4. Insert and secure the hump couplers onto the turbo outlet and the intercooler along with the provided EMSC clamps. Insert the HPS charge pipe into the turbo side first, then into the intercooler side.



- 5. Adjust the charge pipe into position and tighten down all the clamps.
- 6. Reinstall the aluminum under trays back onto the vehicle.

FINAL STEPS

Once the intercooler pipe has been positioned and checked for clearance, tighten all of the clamps and secure all of the parts.

Upon completion of the installation, reconnect the negative battery terminal before you start the engine. Double check to make sure everything is tight and properly positioned before starting the vehicle.

Start the engine. Let the car idle for 3 minutes. Perform a final inspection before driving. Listen carefully for any odd noises, rattles and/or air leaks prior to taking it for a test drive. If any problems arise go back and check the vacuum lines, hoses and clamps that may be causing leaks or rattles and correct the problem.

Periodically, recheck the alignment of the intercooler pipe and make sure there is proper clearance around and along the length of the intercooler pipe. Failure to follow proper maintenance procedures may cause damage and void your warranty.

Also available for Honda 2018-2022 Accord 2.0L Turbo



Contact an authorized HPS Performance dealer or visit us at hpsperformanceproducts.com for more details