


EXTREME ENVIRONMENT GAUGE (EEG) FULL SWEEP ELECTRIC TEMPERATURE GAUGE

2650-1906-77



USE TEFLON SEALING TAPE OR SEALING COMPOUND ON PIPE THREADS

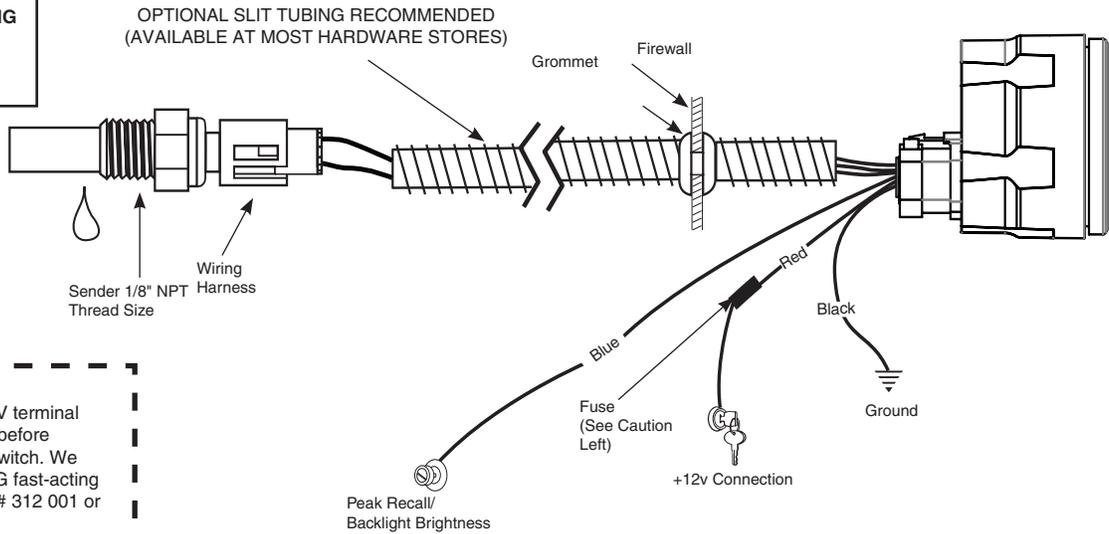

CAUTION!
As a safety precaution, the +12V terminal of this product should be fused before connecting to the 12V ignition switch. We recommend using a 1 Amp, 3AG fast-acting type cartridge fuse (Littlefuse® # 312 001 or an equivalent).

Installation

NOTE: Some late model vehicles use electronic sensors in their pressure and temperature senders for engine control functions. Before removing the original sender, we recommend that you contact your automotive dealer to be sure no critical functions will be disrupted.

1. Check that you have all parts required for installation, and the engine is cool.
2. Disconnect the negative (-) battery cable.
3. Gauge mounts in a 2-1/16" hole. Use supplied bracket to secure gauge to dash.
4. Drill 1" diameter hole where wires pass through sheet metal (such as firewall) and install rubber grommet provided. (Grommet will require slit.)
5. Connect the blue wire to switched ground for peak recall, the red wire to switched +12V source and the black wire to ground. (see diagram for details)
6. Install temperature sender.

Note: Included sender is 1/8" NPT. For 3/8" NPT or 1/2" NPT ports, use included adapter.

7. Cut end of included dielectric grease packet, and squeeze grease into connector of temperature sender prior to

connecting harness. (Important: This will protect connection from dirt and moisture.)

8. Reconnect negative (-) battery cable.

NOTE: Test all fittings and connections for leaks. If any leaks are detected, determine the cause of the leak and repair. Do not operate vehicle if any leaks are detected.

Caution: LUBRIPLATE® DS-ES is a non-hazardous substance. However, it is recommended to wash hands thoroughly after use.

NOTE: When the ignition is off the pointer may not always rest at zero.

Power-Up

The pointer will move counter clockwise to the lowest tick mark and then moves to the current gauge reading. This procedure is an auto calibration function and is performed on every power up. While this test is being performed, the gauge may make a clicking sound. This is normal.

Peak Recall

Switch the blue wire to ground momentarily to recall the highest temperature reading since the memory was last cleared. The **PEAK** value will be displayed for five seconds. After five seconds, the gauge returns to normal operation. To clear the memory, hold the blue wire to ground for two seconds while the **PEAK** value is displayed. The dial will flicker white to indicate that the value has been cleared. The **PEAK** recall value is retained when power is removed from the gauge.

Full Dial Warning

This gauge features full dial warning. When a warning point is reached, the entire dial illuminates red. In addition, the dial illumination will flash red when an over warn point is reached. The warning points for this gauge are set as follows:

Water Temperature

The high warning value for the Water Temperature gauge has a preset value of 230°F. At 230°F or greater, the dial will illuminate red. The high over warn for the Water Temperature gauge has a preset value of 240°F. At 240°F or greater, the dial will blink red.

Oil Temperature

The high warning value for the Oil Temperature gauge has a preset value of 260°F. At 260°F or greater, the dial will illuminate red. The high over warn for the Oil Temperature gauge has a preset value of 280°F. At 280°F or greater, the dial will blink red.

Backlight Brightness

During normal operation, the backlight brightness is fixed. The gauge allows five preset backlight brightness settings. The default brightness is 75% of maximum. To change the brightness:

1. While the gauge is powered OFF, hold the blue Peak Recall wire to ground.
2. Apply power to the gauge and wait for the pointer to zero and move beyond full scale. The pointer will be pointing straight down at center bottom of the dial.
3. Release the blue Peak Recall wire from ground.
4. Switch the blue Peak Recall wire to ground momentarily to cycle through the five brightness settings.
5. The five options are 0%(OFF), 25%, 50%, 75% or 100% of maximum.
6. Once the desired brightness is selected release the blue Peak Recall wire from ground.
7. After 5 seconds, the gauge shall flicker white indicating the brightness value has been saved.
8. The gauge then returns to normal operation.

SERVICE

For service send your product to Auto Meter in a well packed shipping carton. Please include a note explaining what the problem is along with your phone number. If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

12 MONTH LIMITED WARRANTY

AutoMeter Products, Inc. warrants to the consumer that all AutoMeter High Performance products purchased from an Authorized AutoMeter Reseller will be free from defects in material and workmanship for a period of twelve (12) months from date of the original purchase. Products that fail within this 12 month warranty period will be repaired or replaced at AutoMeter's option, when determined by AutoMeter that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the AutoMeter High Performance product and the necessary labor done by AutoMeter to effect the repair or replacement of the AutoMeter High Performance product. In no event shall AutoMeter's cost to repair or replace an AutoMeter High Performance Product under this warranty exceed the original purchase price of the AutoMeter High Performance Product. Nor shall AutoMeter Products, Inc. be responsible for special, incidental or consequential damages or costs incurred due to the failure of an AutoMeter High Performance Product. This warranty applies only to the original purchaser of the AutoMeter High Performance Product and is non-transferable. This warranty also applies only to AutoMeter High Performance Products purchased from an Authorized AutoMeter Reseller. All implied warranties shall be limited in duration to the said 12 month warranty period. Breaking the instrument seal, improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. AutoMeter disclaims any liability for consequential damages due to the breach of any written or implied warranty on all products manufactured by AutoMeter Products, Inc. For a comprehensive listing of Un-Authorized Auto Meter Resellers please visit www.autometer.com/autometerlocator/index/unauthorized.

FOR SERVICE SEND TO: **AUTO METER PRODUCTS, INC.** 413 W. Elm St., Sycamore, IL 60178 USA (866) 248-6357

Email us at service@autometer.com

<http://www.autometer.com>



The Super Bezel is a registered trademark of Auto Meter Products, Inc.