


PART # 29904

HI-LIFT JACK MOUNT 4" HIGH RACK

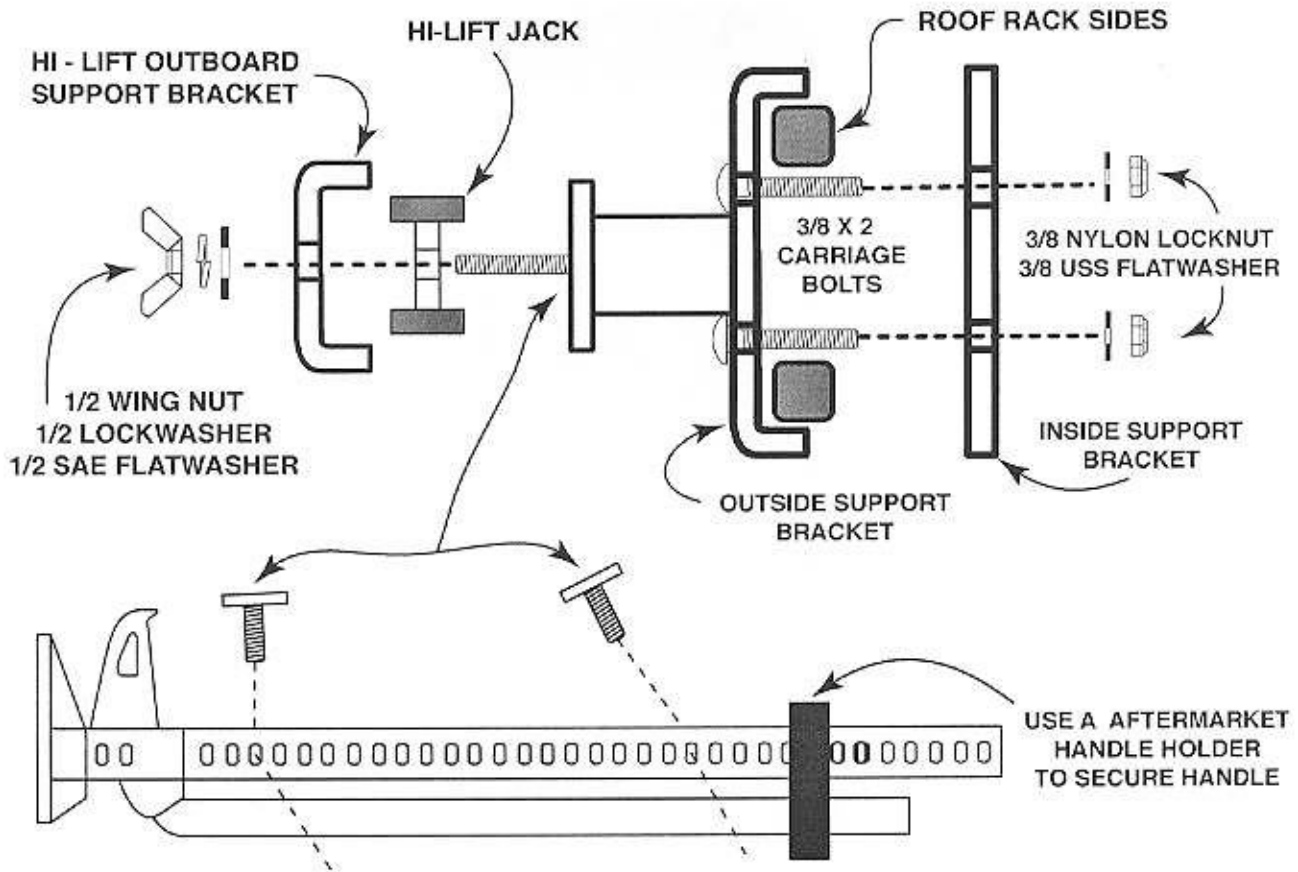

PARTS LIST

2 - HI-LIFT SUPPORT BRACKETS
2 - OUTSIDE SUPPORT BRACKETS
2 - INSIDE SUPPORT BRACKETS
2 - 1/2 WING NUTS

2 - 1/2 SAE FLATWASHERS
2 - 1/2 LOCKWASHERS
4 - 3/8 NYLON LOCKNUTS
4 - 3/8 USS FLATWASHERS

INSTALLATION INSTRUCTIONS

- 1 - INSTALL INSIDE AND OUTSIDE SUPPORT BRACKETS TO ROOF RACK SIDE AS SHOWN.
- 2 - SPACE MOUNTING BRACKETS APPROX 15" TO 18" APPART, SLIGHTLEY TIGHTEN TO HOLD IN PLACE
- 3 - INSTALL HI-LIFT JACK ON THE 1/2 BOLTS THAT COMING OUT OF THE MOUNTING BRACKETS AS SHOWN. ADJUST AND TIGHTEN MOUNTING BRACKET BOLTS, SO THAT THE JACK WILL GO ON AND OFF EASILY.
- 4 - SECURE THE JACK TO THE MOUNTING BRACKETS AS SHOWN AND TIGHTEN.