

FR Shields™



FR Shields™ prevent radiant heat from soaking the fuel rails. These will improve performance and help reduce instances of pre-ignition. We all know the benefits of keeping the fuel that's headed into the engine cool, but fuel-injected vehicles also need to keep the fuel returning to the gas tank or fuel cell cool? Over a long-distance race, hot fuel returning to the fuel cell can really heat it up, so keeping fuel temps down while returning to the fuel cell can be almost as vital as keeping the fuel delivered to the engine cool. When the warm fuel returns to the fuel cell, it will heat up the fuel in the cell, which causes it to change the chemical balance of your fuel, greatly affecting the existing tune settings. Keeping fuel cool helps to preserve the chemical balance of the fuel and maintains maximum efficiency. FR Shields™ are available in kits to fit either single- or dual-rail systems.



FEATURES


- Reduces fuel temperatures
- Improves performance
- Helps prevent pre-ignition
- Easy to install

PART NO.	DESCRIPTION
700270	Universal kit for 1 rail
700271	Universal kit for 2 rails

HP Starter Shield™



HP Starter Shield™ prevents starter failure caused by excessive heat exposure. Using an HP Starter Shield™ also protects the solenoid and starter from starter heat lock. Quality construction and design allow for easy installation: Simply wrap the HP Starter Shield™ around the starter and fasten with the built-in hook-and-loop fasteners. Starter removal is not necessary for most applications, and two different sizes are available, eliminating the need for trimming. Our 500025 HP Starter Shield™ is recommended in applications where there is less than 1-inch air space between the starter and heat source.

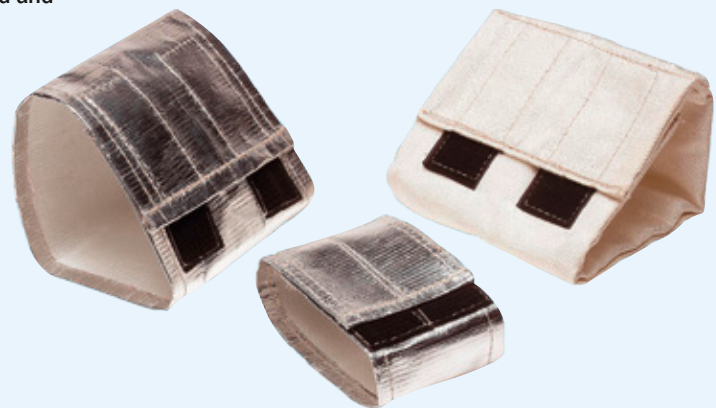

FEATURES

- Prevents starter heat soak
- Easy installation; starter removal is not necessary
- Extends the life of starter motors and solenoids

PART NO.	DESCRIPTION
500025	Medium Size Starters; 7" x 21¼" - double insulated
501000	Medium Size Starters; 7¼" x 21¾"
501010	Small High-Torque Starters; 3½" x 18"