

GMC SIERRA REAR MUD GUARD - INSTALLATION INSTRUCTIONS

Please read instructions thoroughly before installation.

Tools Required

- Phillips Screwdriver
- 1/8" Drill bit / Driver

Package Contents


- Driver & passenger side rear mud guards
- #10 SEM SCREWS (Qty 6)
- Instruction sheet

MUD GUARD INSTALLATION

NOTE: It may be necessary to remove the wheels before mud guard installation.

Determine which mudguard you have by locating the part number molded in the mounting flange (5789 LH 5789 RH).

1. Using the mudguard as a template, mark and drill an 1/8" hole at locations A, B and C
2. Install #10 SEM screws at locations A, B and C.

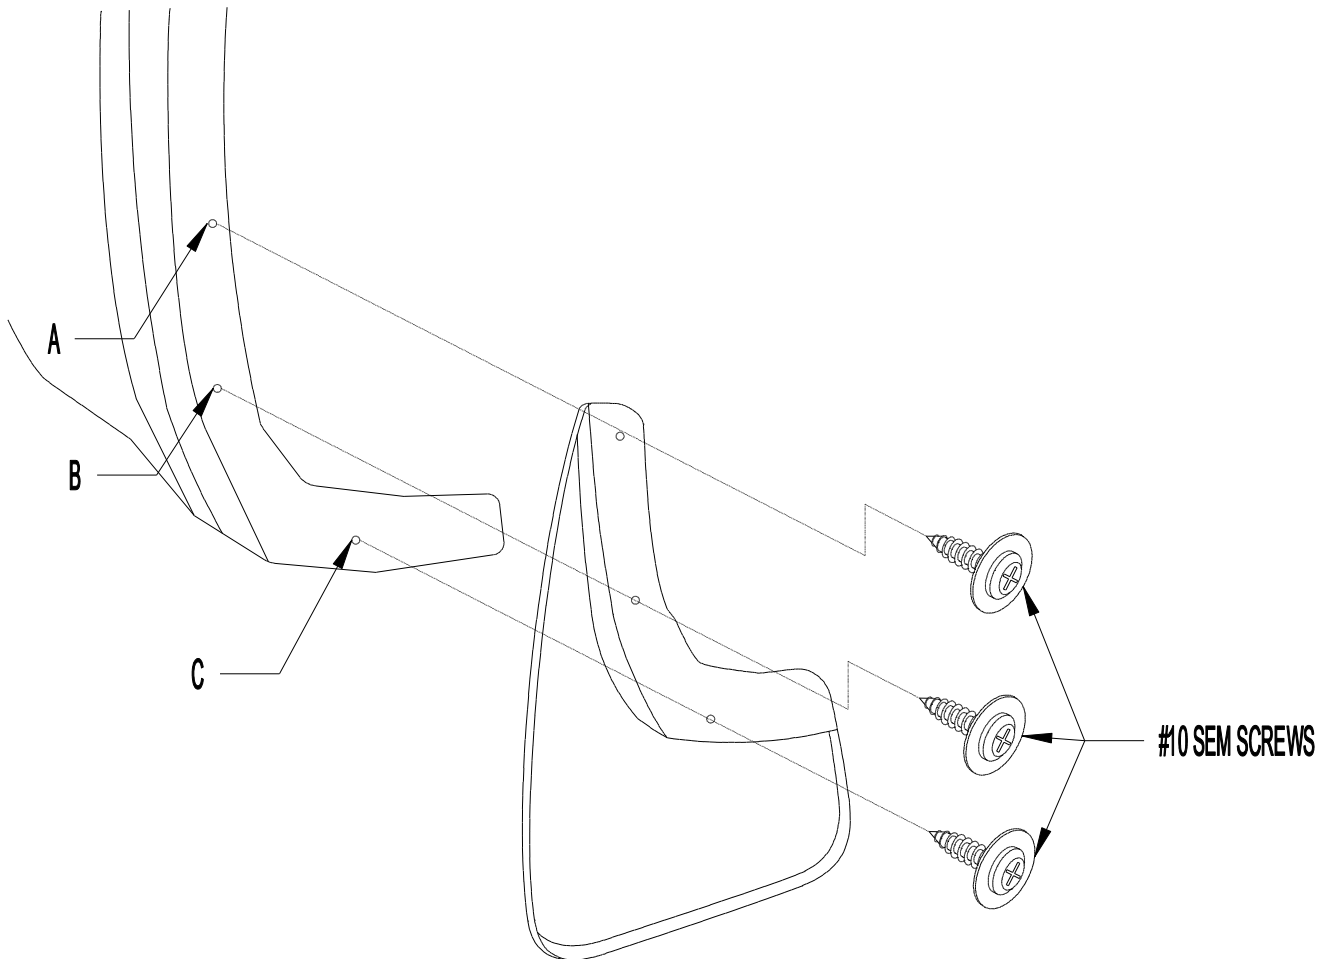

View the Husky Liners® Lifetime Warranty at www.huskyliners.com/lifetime-warranty.
Patent and Trademark can be found at www.hl-ip.com