

IAG V2 EZ-Lift Soft Top Assist System for 21+ Ford Bronco 4 Door Soft Top



IAG V2 EZ-Lift Soft Top Assist System for 2021 + Ford Bronco 4 Door Soft Top

Part# IAG-BDY-F1003

Congratulations on the purchase of your IAG V2 EZ-Lift Soft Top Assist System, and thank you for choosing IAG Off Road. These instructions are intended for users with basic mechanical skills. Professional installation is not required. The average installation time is approximately 20-30 minutes.

Video instructions can be found at the link below.

https://youtu.be/WTrji_3kD6w

Step 1/37



IAG-BDY-F1003 IAG V2 EZ-Lift Soft Top Assist System for 2021 + Ford Bronco 4 Door Soft Top

Part# IAG-BDY-F1003

Tools Required For Installation:

12mm Wrench, 13mm Wrench, T30 Torx, Socket Wrench, 4mm Allen (provided)


Optional: Plastic Body Panel Tool

Step 2/37

Step 3/37

Numbered annotations (7)

- 1 EZ-Lift Struts
- 2 Bungee Assits
- 3 Thumb Knob
- 4 Ball Mount
- 5 Strut Bracket
- 6 Lengthened Strut Bracket Bolt
- 7 4mm Allen

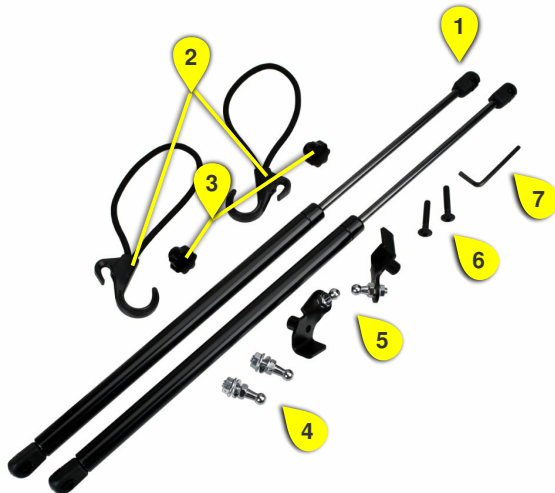




Step 4/37

Numbered annotations (1)

- 1 Remove the panel cover over the soft top mounting points

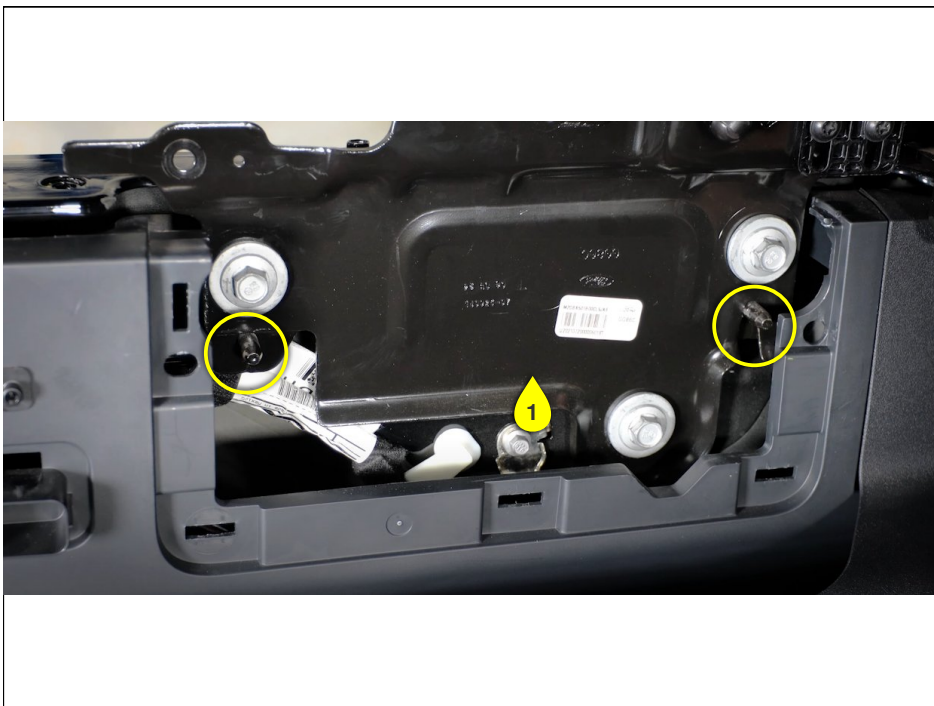

Step 5/37

Numbered annotations (1)

- 1 Check the bracket alignment to insure it is fully seated down on to the leveling dowels

Step 6/37

Numbered annotations (1)

- 1 Easiest to install with all rear windows removed



Step 7/37

Numbered annotations (1)

- 1 Open your tailgate



Step 8/37

Numbered annotations (1)

- 1 Release your soft top latches



Step 9/37

Numbered annotations (1)

- 1 Using the T30 Torx locate and remove the strap bolt



Step 10/37

Numbered annotations (1)

- 1 Make a note of which way the bolt is facing



Step 11/37

Numbered annotations (1)


- 1 Using factory washers and provided lengthened bracket bolt place that bolt the same way as the factory bolt



Step 12/37

Numbered annotations (1)


- 1 Note the drivers (left) and passenger (right) side layout of the bracket

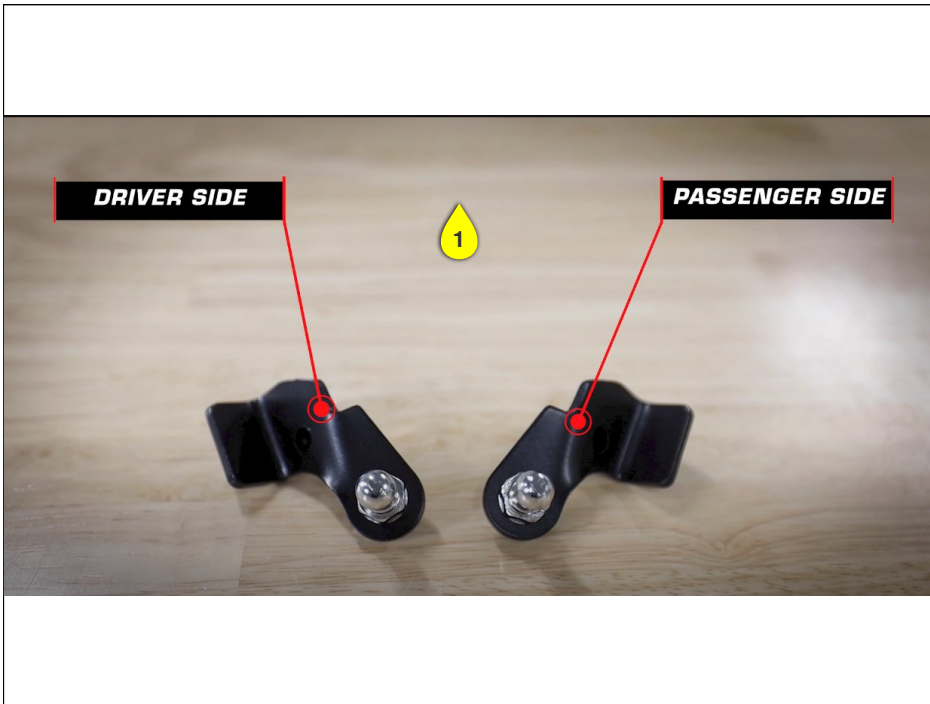

Step 13/37

Numbered annotations (1)

- 1 Place passenger (right) side bracket onto the bolt

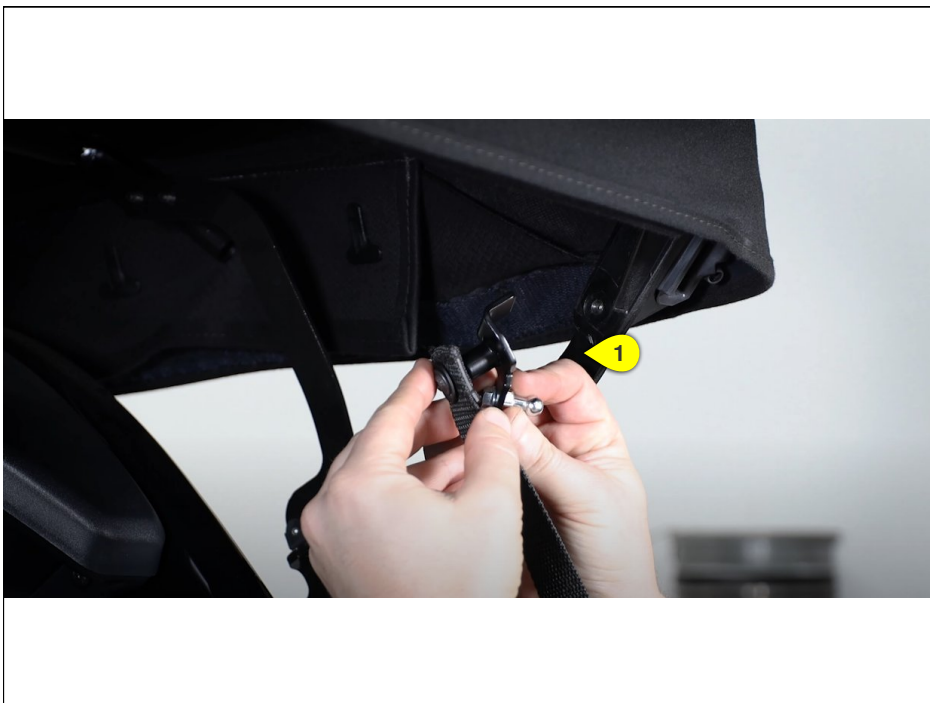

Step 14/37

Numbered annotations (1)


- 1 Use a 4mm Allen to tighten the bolt



Step 15/37

Numbered annotations (1)

- 1 Using the T30 Torx remove the strap bolt from the Drivers (left) side

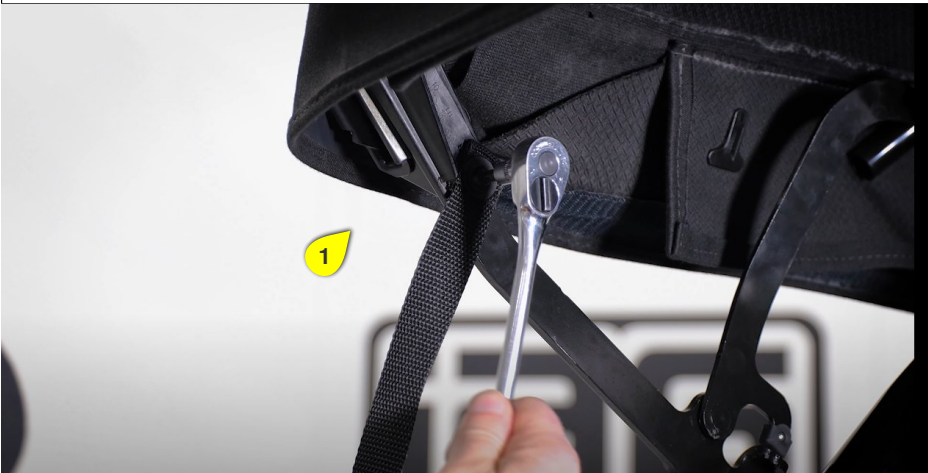

Step 16/37

Numbered annotations (1)


- 1 Install lengthened bolt (provided) the same way as factory and the Drivers (right) side bracket on to the bolt



Step 17/37

Numbered annotations (1)

- 1 Tighten using 4mm Allen

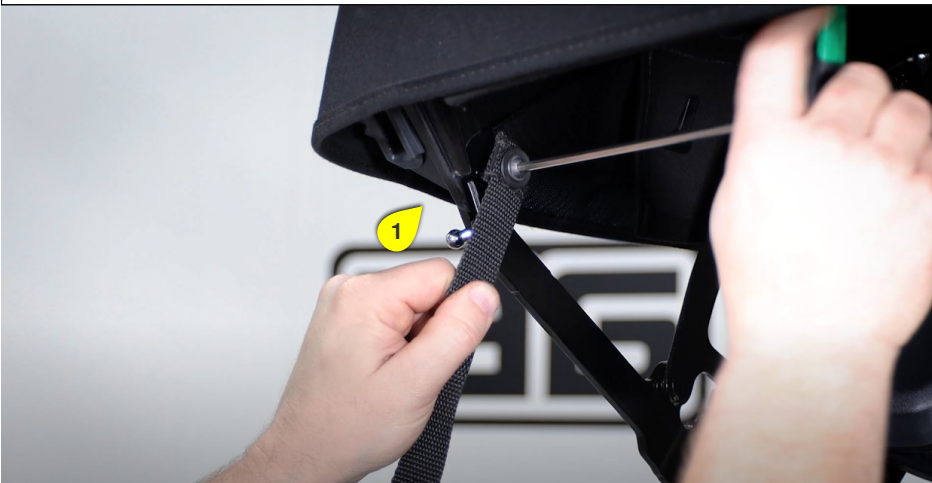

Step 18/37

Numbered annotations (1)


- 1 Raise and support your rear soft top using the prop rod



Step 19/37

Numbered annotations (1)


- 1 Locate placement for your ball mounts

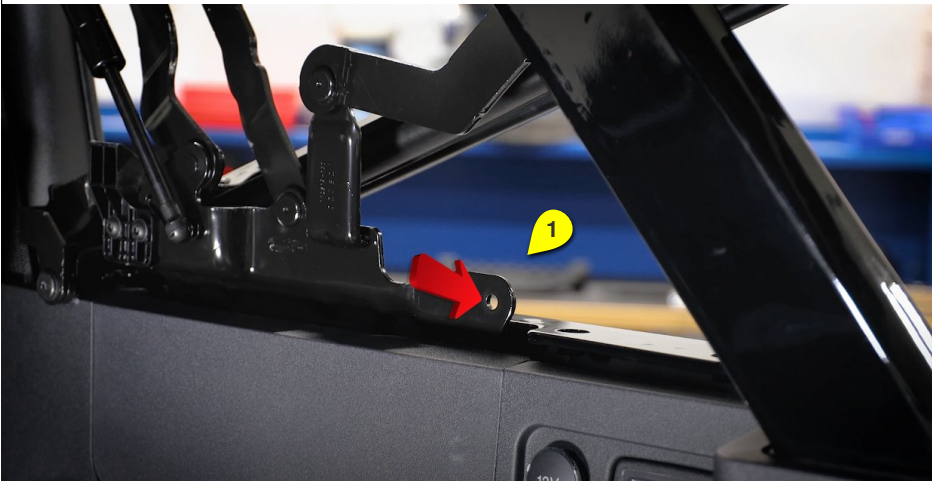

Step 20/37

Numbered annotations (1)


- 1 Install ball mount with the ball facing toward the interior of the vehicle

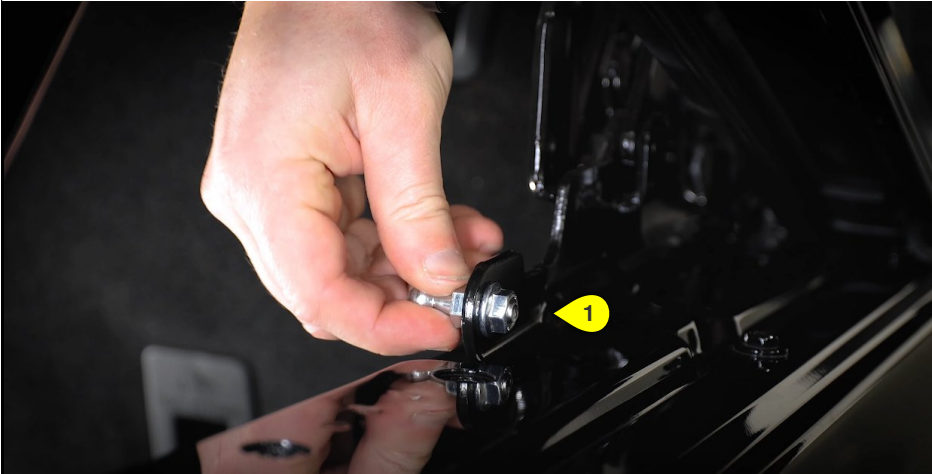

Step 21/37

Numbered annotations (1)

- 1 Tighten using your 12mm and 13mm wrench

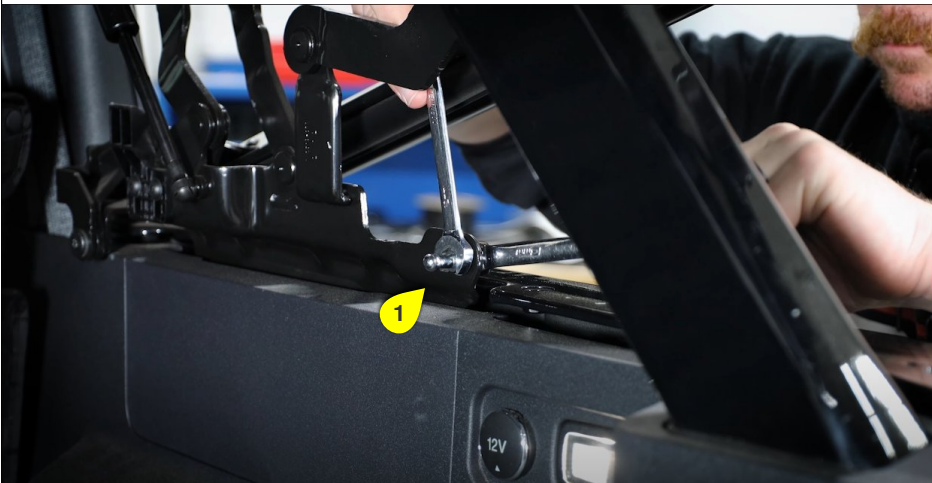

Step 22/37

Numbered annotations (1)


- 1 Repeating step 20 on the other side place the ball mount facing in toward the vehicle



Step 23/37

Numbered annotations (1)

- 1 Tighten using your 12mm and 13mm wrench

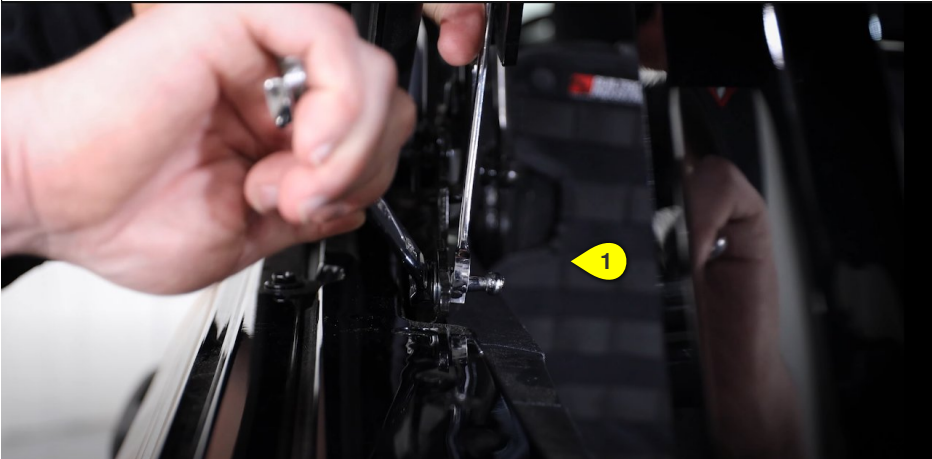

Step 24/37

Numbered annotations (1)

- 1 Lower your rear soft top but avoid latching it down



Step 25/37

Numbered annotations (1)

- 1 Press in to install the thin rod strut onto the ball mount



Step 26/37

Numbered annotations (1)

- 1 Proper installation of thin side rod ball mount



Step 27/37

Numbered annotations (1)

- 1 Repeat step 25 by pressing to install thin rod end ball mount on the other side of the vehicle



Step 28/37

Numbered annotations (1)

- 1 Raising your soft top back up install upper ball mount on to the upper ball mount bracket



Step 29/37

Numbered annotations (1)

- 1 Repeat on opposite side pressing in to install the upper ball mount onto the upper ball mount bracket



Step 30/37

Numbered annotations (1)

- 1 Securely shut you rear soft top to check function and alignment



Step 31/37

Numbered annotations (1)

- 1 Wrap your bungee loop around the thumb knob



Step 32/37

Numbered annotations (1)

- 1 Attach plastic hook end around the space between the strap and frame provided by the ball mounting bracket



Step 33/37

Numbered annotations (1)

- 1 Install thumb knob onto the forward most bolt



Step 34/37

Numbered annotations (1)

- 1 Repeat the install of thumb knob onto the forward most bolt on the other side



Step 35/37

Numbered annotations (1)

- 1 Wrap your bungee loop around the thumb knob



Step 36/37

Numbered annotations (1)

- 1 Attach plastic hook end around the space between the strap and frame provided by the ball mounting bracket



Step 37/37

Numbered annotations (1)

- 1 Check function of your EZ-Lift Soft Top Assist System and enjoy the EZ-Life

