
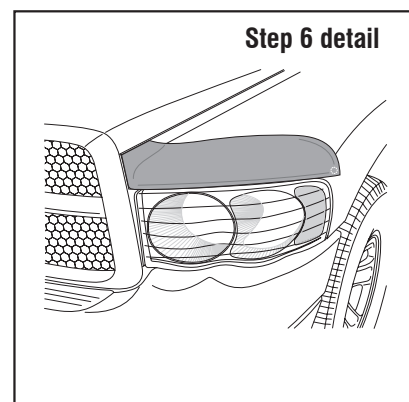
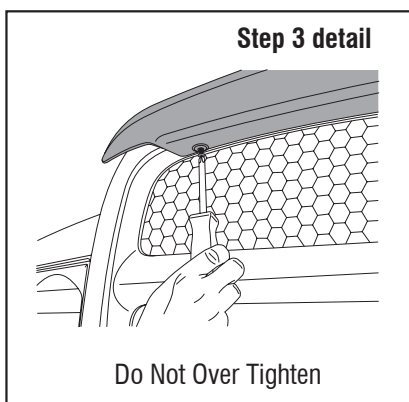


1. Locate (4) circular holes on the underside of the front grill. Remove any dust or debris.
2. Align the predrilled holes in the hoodshield with the holes in the underside of grill.
3. Using a phillips screwdriver, install the fastener. (See detail below)
4. **Fender Protector Installation:** Clean the fender protector mounting location with an alcohol pad.
5. Expose 2" (5 cm) of tape liner from each end of the flanges on the fender protector.
6. Align fender protector with front edge of fender. With the fender protector in final position, remove the remainder of the tape liner by pulling on loose ends. Press firmly on flanges to ensure adhesion. (See detail below.)
7. Apply bump on as indicated. **Repeat Steps 4-7 for passenger side fender protector.**

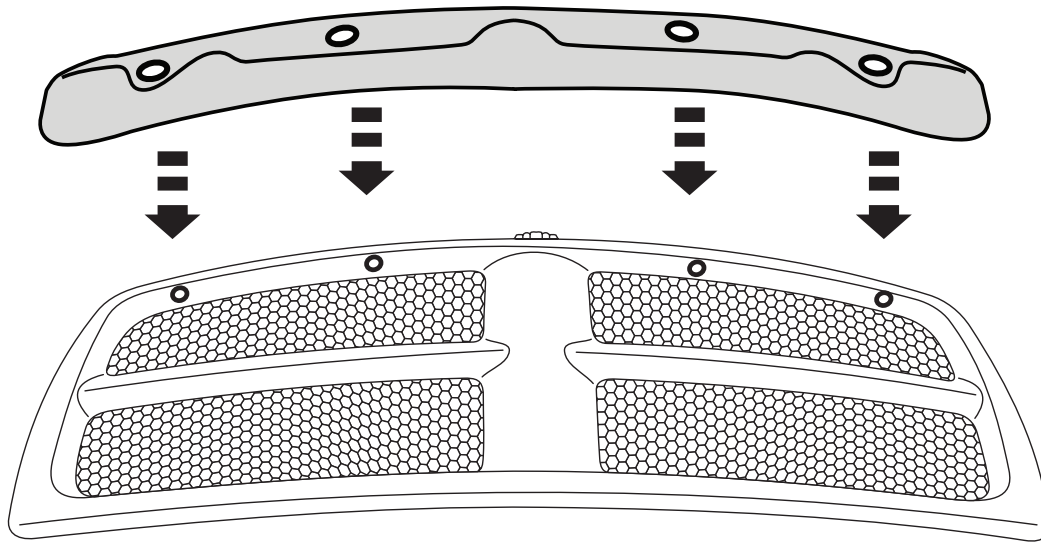

**IMPORTANT:** Before driving, ensure the hood shield is properly secured to vehicle. Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.