



Turbo-Rack


Part No. 968



REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT.




READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.



DO NOT OVER TORQUE. STANDARD OPERATING LOAD FOR TIGHTEN BODY MOUNT NUTS & BOLTS VARIES FROM **45** TO **65** FOOT POUND.



5 min



Cutting Not
Required



Drilling Not
Required



support@trailfx.com



1 866 638 4870

INSTALLATION PROCEDURE:

STEP 1: ATTACHING THE STRSP- THRU TURBO- RACK

1. Clean roof surface before use.
2. Inset each end of the bar in the hole in form towers (printing on foam blocks face outwards).
3. Adjust bar width to place foam towers at outer most part of roof. Simply press in both quick release buttons and slide to desired position hole.
4. Insert strap hooks into hole at either end of bar (just outside of foam towers).

IMPORANT 1: INSERT STRAP END BCK OF CLAME


1. With doors open, place straps inside vehicle, feed strap end into back of strap claps, check position of foam towers and then pull strap to tighten in clamp. Secure loose strap end.
2. Recheck position to make sure strap is clear of occupants in vehicle.
3. Consult vehicle owner's manual for roof weight capacity (Usually the limit is 100lbs.) TURBO-RACK is intended to support 1 ladder or canoe or item of similar weight.
4. TRACK-RACK Is Designed for occasional use only. It is not intended to be permanently used on a vehicle.
5. STRAP 2: LOADING AND SECURING ITEMS TO TURBO-RACK.
6. Place item directly onto rack and center item.
7. Attach item directly to the rack with rope or bungee core.
8. Attach a front and rear line (rope or ratchet strap) from the item to the front and rear of the vehicle. Protect paint on hood where this line touches with a pad or cloth.
9. Recheck attachment occasionally during use.

STRAP 2: LOADING AND SECURING ITEMS TO TURBO-RACK

1. Place item directly onto rack and center item.
2. Attach item directly to the rack with rope or bungee cord.
3. Attach a front and rear line (rope or ratchet strap) from the item to the front and rear of the vehicle. Protect paint on hood where this line touches with a pad or cloth.
4. Recheck attachment occasionally during use.

WARNING: Do not use this strap- thru rack if your vehicle is equipped with roof mounted side air bags. The turbo – rack strap could interfere with the bags` deployment.

IMPORTANT: INSERT STRAP END INTO BACK OF CLAMP.

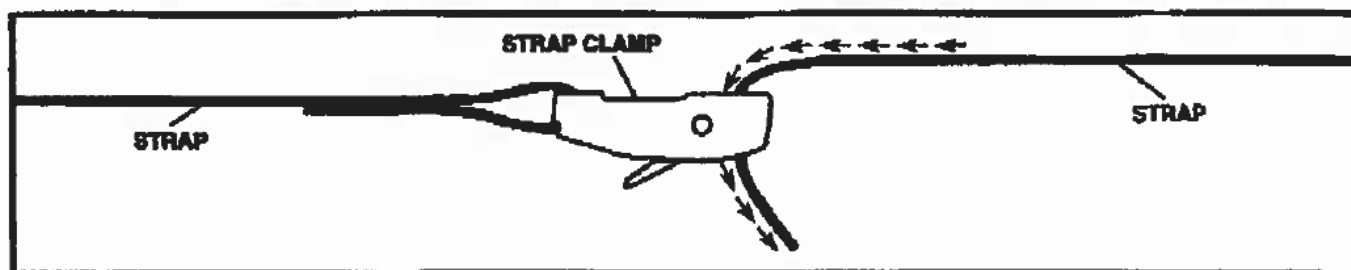

WARNING

- The assumes all risks associated with the use of this product,
- Including risk of property Damage, and or personal injury/death.
- Do not Exceed the 350 lb. Maximum weight on the Extend-A-Truck
- Do not use the Extend-A-Truck in darkness or in conditions with poor visibility.

PRODUCT CARE

1. Periodically check the product to ensure all fasteners are tight and components are intact.
2. Regular waxing is recommended to protect the finish of the product.
3. **Use ONLY Non-Abrasive automotive wax.** Use of any soap, polish or wax that contains an abrasive is detrimental and can scratch the finish leading to corrosion.
4. Mild soap may be used to clean the product for both **Stainless-steel and Black finish.**

FAQ's

1. **Can it Uninstall Easily?**
Yes, it can be uninstalled easily.
2. **Is it adjustable to the height for roof top / bed extension?**
Yes, it is adjustable.
3. **Products are thumping / rattling after installation.**
Please ensure that all required mounting brackets / hardware's are installed & tighten correctly. Suggest using white lithium / regular grease between the metal to metal contact surfaces.
4. **Missing / Excess Hardware.**
Recheck hardware count as per the part list.

Check out these other TrailFX Products!!

www.TrailFX.com



Keystone Automotive Operations Inc. (KAO) warrants this product to be free of defects in material and workmanship at the time of purchase by the original retail consumer. KAO disclaims any other warranties, express or implied, including the warranty of fitness for a particular purpose or an intended use. If the product is found to be defective, KAO may replace or repair the product at our option, when the product is returned prepaid, with proof of purchase. Alteration to, improper installation, or misuse of this product voids the warranty. KAO's liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for any incidental or consequential loss or damage.