

INSTALLATION INSTRUCTIONS


6" PREMIER AND 4" OVAL TUBE MOUNT KIT APPLICATION:

2008-2016 Toyota Sequoia

AUTOMOTIVE PRODUCTS,		PART NUMBER: 22-1875	
ITEM	QUANTITY	DESCRIPTION	
1,2	2	STEP BAR , PASSENGER (1) AND DRIVER (2) (SOLD SEPERATELY)	

ITEM	QUANTITY	DESCRIPTION	TOOLS NEEDED
1,2	2	STEP BAR , PASSENGER (1) AND DRIVER (2) (SOLD SEPERATELY)	13MM SOCKET 13MM WRENCH
3	2	FRONT BRACKET	7/16" SOCKET
4	2	FRONT/CENTER BRACKET	RATCHET
5	2	REAR/CENTER BRACKET	TORQUE WRENCH
6,7	2	REAR BRACKET, PASSENGER (6) AND DRIVER (7)	
8	16	M8 HEX HEAD BOLT	
9	16	3/8" FLAT WASHER	
10	16	3/8" LOCK WASHER	
11	8	MOUNT ADAPTER PLATE (INCLUDED WITH STEP BARS)	
12	32	M6 LOCK NUT (INCLUDED WITH STEP BARS)	
13	32	M6 FLAT WASHER (INCLUDED WITH STEP BARS)	
14	8	6 INCH ADAPTER PLATE (INCLUDED WITH STEP BARS)	

ANTI-SEIZE LUBRICANT MUST BE USED ON ALL STAINLESS STEEL FASTENERS TO PREVENT THREAD DAMAGE AND GALLING

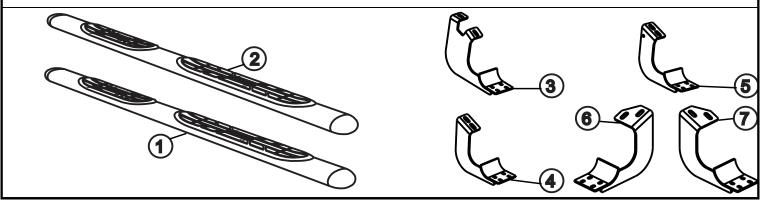


PROCEDURE


- 1. Remove contents from box, verify if all parts listed are present and free from damage. Carefully read and understand all instructions before attempting installation.
 - Failure to identify damage before installation could lead to a rejection of any claim.
- 2. Determine front, front center, rear center, and rear brackets. Rear/center bracket has 1 identification hole.
- 3. Attach drivers side brackets to underside of body panel using two M8 hex head bolts, 3/8" flat washers, and 3/8" lock washers per bracket. Hand tighten. **See FIGURE 1.**
- 4. Slide mount adapter plates on step bar as shown. Place step bar on saddle with long pad forward and end cap screw facing inward. Assemble with M6 hardware. **See FIGURES 2, 3, & 4.** Reference installations sheet, 75-0820, Oval Tube Mount Adapter Kit.





Westin Automotive Products, Inc. 320 W. Covina Blvd San Dimas, Ca. 91773

- 5. Make sure step bar and brackets are properly aligned with vehicle and tighten fasteners. Recommended torque values are 23 FT.LBS. for M8 fasteners and 6 FT.LBS for factory M6 bolts.
- 6. Repeat installation for passenger side.

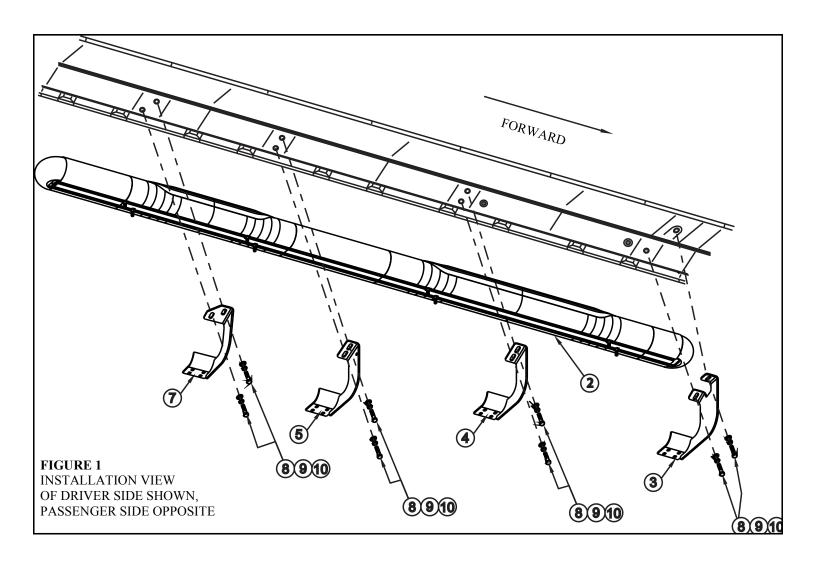

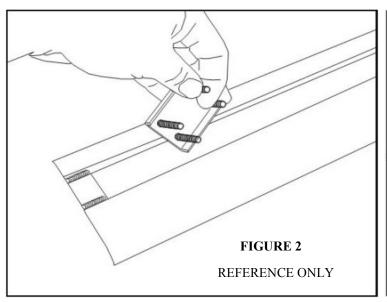

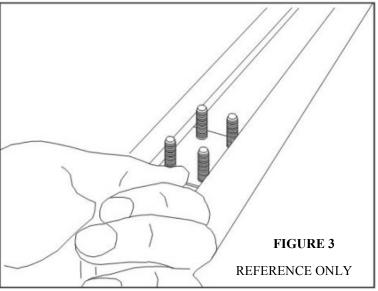

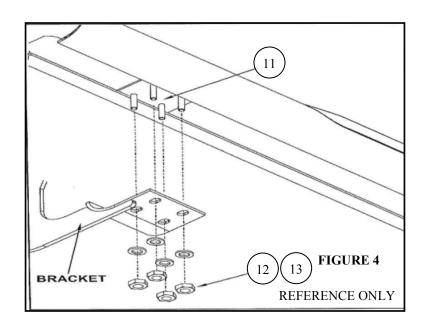

CARE INSTRUCTIONS

- REGULAR WAXING IS RECOMMENDED. DO NOT USE ANY TYPE OF POLISH OR WAX THAT MAY CONTAIN ABRASIVES.
- STAINLESS STEEL PRODUCTS CAN BE CLEANED WITH MILD SOAP AND WATER. STAINLESS STEEL POLISH SHOULD BE USED TO POLISH SMALL SCRATCHES.
- GLOSS BLACK FINISHES SHOULD BE CLEANED WITH MILD SOAP AND WATER.



Westin Automotive Products, Inc. 320 W. Covina Blvd San Dimas, Ca. 91773