
Installation Instructions

I - Sheet Number 40392277 Rev. A

Liquid Transfer Tank

For proper installation and best possible fit, please read all instructions BEFORE you begin. For technical assistance or to obtain missing parts, please call Customer Relations at 800-241-7219.

Important Safety Information

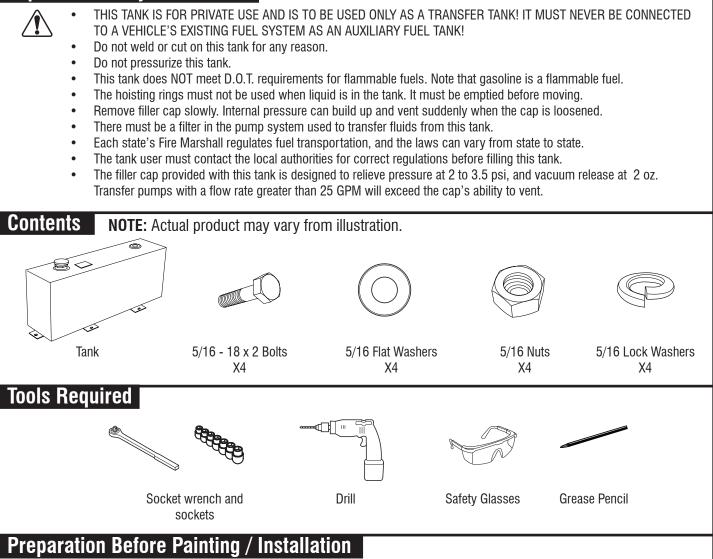

• Wash and dry your vehicle to remove any debris and/or dirt from the installation area.

Warnings / Cautions




• CAUTION: FAILURE TO FOLLOW INSTALLATION INSTRUCTIONS MAY RESULT IN LOSS OF CONTENT AND MAY PRODUCE FIRE AND/OR ENVIRONMENTAL HAZARD.

These transfer tanks are designed and manufactured to be used as a liquid transfer tank ONLY. These are SOLELY FOR PRIVATE USE and not for interstate commerce or commercial applications. These are NOT designed for use as an auxiliary fuel tank to be connected to your vehicle's primary fuel system. Their intended use and design DOES NOT meet Title 49 of the U.S. Federal Register, governing transportation. These tanks MUST BE VENTED AT ALL TIMES to allow for expansion and to prevent any vacuum formation during liquid removal. These Liquid Transfer Tanks are intended for use with combustible fuels only (such as diesel fuels). These tanks DO NOT MEET Department of Transportation regulations for flammable fuels (such as gasoline).

Installation Steps NOTE: Actual application may vary slightly from illustrations.

- 1. Check hardware kit to ensure that all components are accounted for. Refer to Contents section above.
- 2. Place tank in desired location in bed of pick-up. (Be sure tank is not rubbing edges of cargo bed.)
- 3. Mark location of (4) mounting holes in the mounting bracket at the desired location. Remove tank before drilling holes).
- 4. Drill 3/8" holes in marked location (CAUTION: Check to ensure the area is free of fuel lines, brake lines, and wiring).
- 5. Return tank to predetermined location.
- a) Insert bolt with Flat Washer up into 3/8" hole in floor of pick-up bed & mounting foot on tank.
 b) Slip Lock Washer on to Bolt.
 c) Secure Bolt with Nuclei Nut
- c) Secure Bolt with Nylock Nut.7. Do not over tighten Nylock Nut!

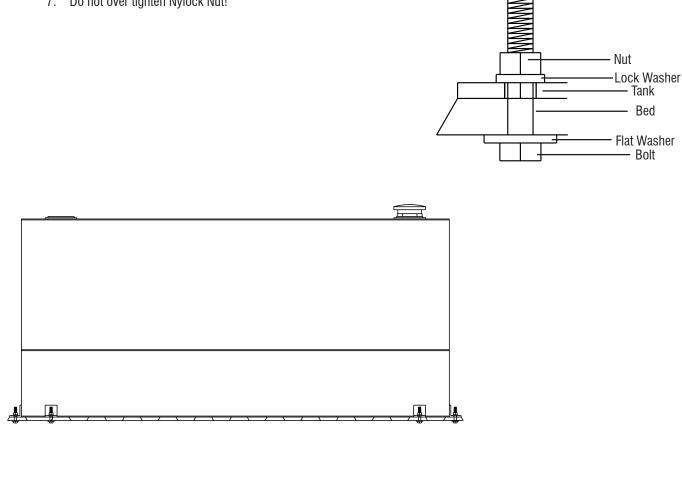

Care and Cleaning

• Wash only with mild soap & dry with a clean cloth.

Congratulations!

You have purchased one of the many quality Lund[®] branded products offered by Lund International, Inc. We take the utmost pride in our products and want you to enjoy years of satisfaction from your investment. We have made every effort to ensure that your product is top quality in terms of fit, durability, finish and ease of installation.



Lund International 800-241-7219 • Visit us at lundinternational.com © 2017 Lund International, Inc. All rights reserved. Lund® and the Lund® logo are trademarks of Lund International, Inc.

