

JEEP 2018-UP JLU Seat Covers

Thank you for choosing Rough Country for all your vehicle needs.

Please read instructions before beginning installation. Check the kit hardware against the kit contents shown below. Be sure you have all needed components and know where they go.

If question exist, please call us @1-800-222-7023. We will be happy to answer any questions concerning this product.

KIT CONTENTS:

Front Seats

- 2-Front Seat headrest covers
- 1-Driver Side front seat base cover
- 1-Driver Side front seat back cover
- 1-Pass Side front seat base cover
- 1-Pass Side seat back cover

Rear Seats

- 2-Rear Seat headrest covers
- 1-Rear Center headrest cover
- 1-Driver Side seat base cover
- 1-Driver Side seat back cover
- 1-Pass Side seat base cover
- 1-Pass Side seat back cover

Tools Needed:


- Flashlight
- Plastic Pry Tool




INSTALLATION INSTRUCTONS

Seats shown removed from vehicle for picture purposes but not required.


1. Remove the head rest, by pushing in the adjustment tab and pulling headrest from the seat. **See Photo 1.**
2. Locate the passenger and driver lower seat base cover. The Driver side will have a slot of the adjustment knob on the side of the driver seat base.
3. Under the seat, remove the 2 straps holding the rear stock seat flap to the chassis of the seat. **See Photo 2.**

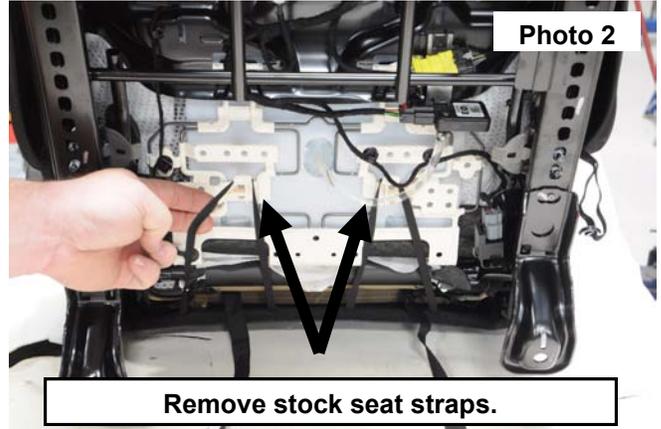


4. Install the lower seat cover by tucking the lower seat base cover between the seat back and seat base as shown in **Photo 3** and working the cover around the adjustment knobs and recline lever using a plastic non-sharp pry tool. Take care not to damage the cover. Using sharp objects will potentially cut and damage the cover.
5. Connect the seat covers strap buckles front to back under the seat, adjust the seat base cover optimize coverage. Do not fully tighten the straps at this time to allow for some adjustment of the seat covers. **See Photo 4.**

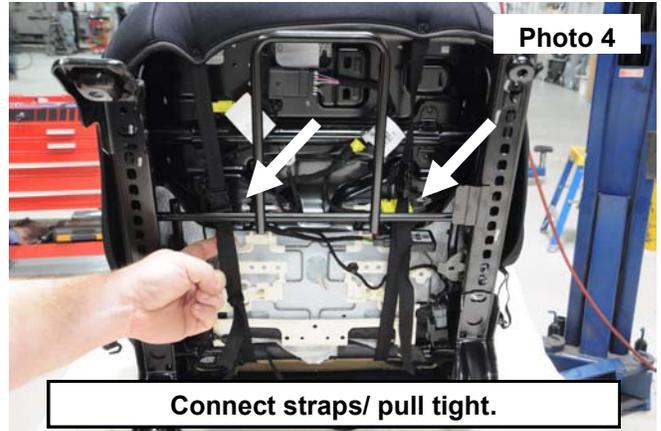

6. Tuck the sides of the seat cover in to position and route the side straps above the adjustment rail using the hooks on the straps to connect the sides. **See Photo 5.**
7. Locate the driver and passenger side seat back covers. The flap on the seat back covers will face outward toward the door to accommodate the factory seat air bags.
8. Install the top of the seat cover, tucking the seat cover flap between the seat back and the seat base and working the seat back cover into position to optimize coverage. **See Photo 6.**

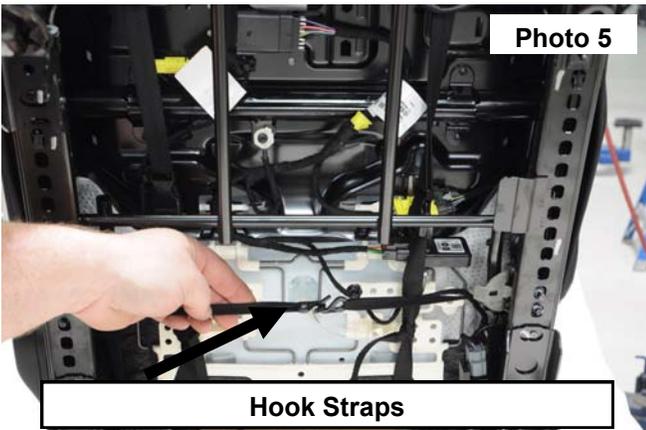

9. The seat flap unstrapped in Step 3 will be flipped up and inside of the new seat cover when installed. The flap can be allowed to hang and not be tucked in if desired, but the fit will be tighter with the flap tucked in the seat back cover.
10. Tuck in the air bag flap and make sure the seat back cover is tucked behind the seat lever recline housing. **See Photo 7.**
11. Pull the flap from the seat back evenly across the back of the seat, adjust the cover to the desired look and secure the top flap against the lower flap to secure across the bottom of the seat. **See Photo 8.**

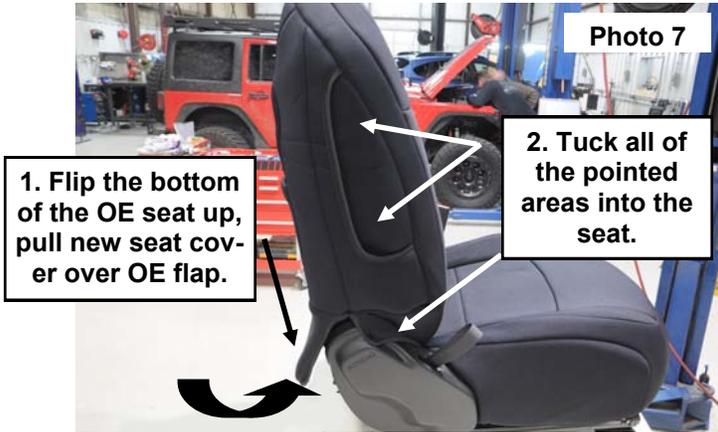

12. Double check all areas that need to be tucked behind the plastic seat components (lumbar, seat tilt leaver) and tighten the lower seat base straps by pulling the end of the straps. Do not over tighten these straps as this may cause irregular wrinkles in the seat base. **See Photo 9.**
13. Install the headrest cover, adjust the headrest cover for optimum coverage. **See Photo 10.**




14. Pull the cover tight use the Velcro to secure around the bottom. **See Photo 11.**
15. Install the headrest cover, insert the stems into the 2 holes on top of the seat and press downward. **See Photo 12.**




INSTALLATION INSTRUCTONS

Seats shown removed from vehicle for picture purposes but not required.

1. Position the rear drivers side seat cover on the seat base and adjust to optimize coverage, tuck the seat base cover between the seat base and seat back. Position straps in around the bottom. **See Photo 1.**
2. Buckle the 2 seat cover straps around the bottom of the seat in **Photo 2.** **Adjust the cover and** attach the hooks together on the side of the seat straps, seen in **Photo 2.** Tighten the buckle straps.

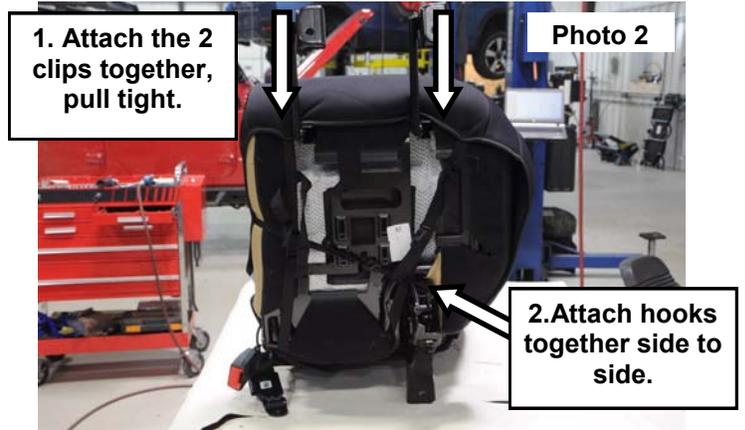

3. Install the drivers side top seat cover, adjust to optimize coverage and pull the zipper closed on the back side of the cover. **See Photo 3.**
4. Tuck the lower front flap of the seat back cover between the seat back and seat base. Pull the lower flap to tighten seat cover and secure with the upper flap by placing the lower flap under the upper seat base flap. **See Photo 4.**

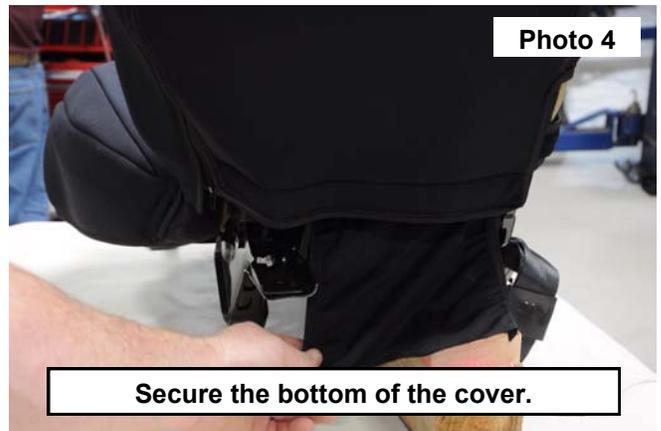


5. Flip the headrest down and secure the top of the seat cover, position to optimize coverage and secure using the Velcro on the end of the seat cover. **See Photo 5.**
6. Install the cover onto the headrest, return to the upright position. Adjust the headrest cover as needed. **See Photo 6.**





7. Install the passengers side seat base cover onto the seat, adjust to optimize coverage. **See Photo 7.**
8. Connect the 4 buckle seat cover straps around the bottom of the seat. Adjust seat base cover and pull tight. Do not over tighten these straps as this may cause irregular wrinkles in the seat base. **See Photo 8.**



9. Connect the hooks on the side straps to the bottom of the seat frame, see pointed areas in. **Photo 9.**
10. Remove the middle headrest in the top of the passengers side seat by pressing the adjustment tab and put aside for head rest cover install in a later step.
11. Unzip the rear passenger side seat back cover. Install in the seat back making sure to go under the center seat belt and wrap around to the back. adjust the cover to optimize coverage and match all openings. **See Photo 10.**

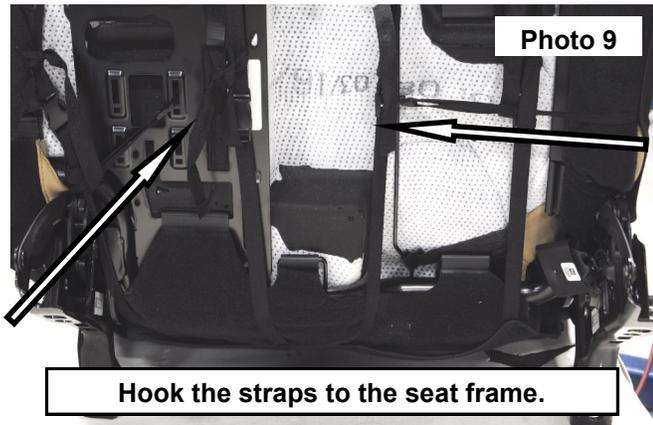


12. Tuck the flap of the seat back between the seat back and the seat base. Adjust the cover to optimize coverage across the seat bottom. Close the zipper. Pull the bottom flap up and adjust seat back cover to optimize coverage. **See Photos 11.**
13. Make sure the seat cover is adjusted and pull the lower flap tight around the seat and secure by placing the lower flap under the seat back cover. **See Photos 12.**

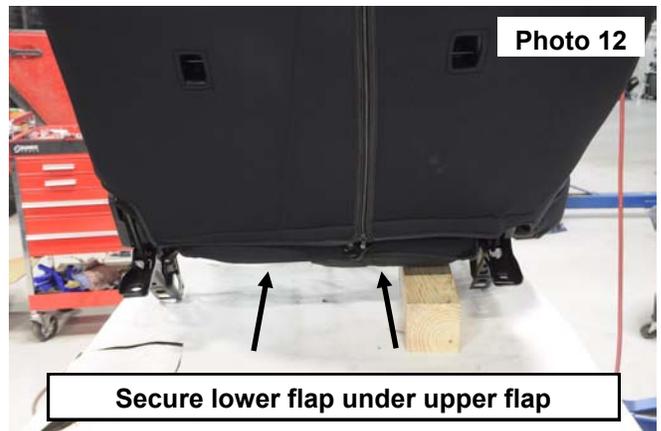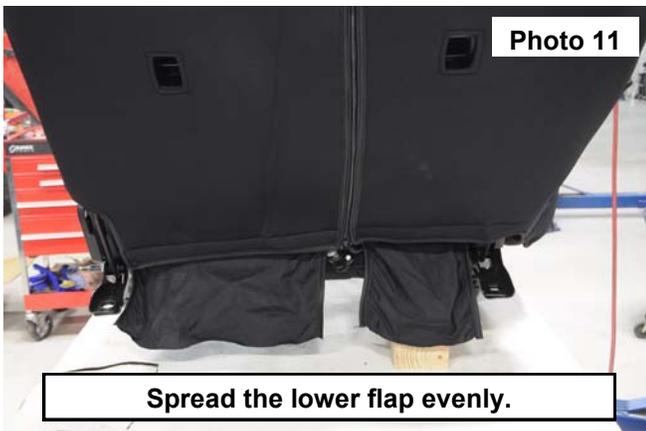

14. Pull the flap through the headrest mount, secure with the Velcro on the back side of the seat cover. **See Photo 13.**
15. Install the passengers side headrest cover and adjust as necessary to cover the headrest. **See Photo 14.**



16. Re-install the middle seat headrest into the seat back. **See Photo 15.**
17. Adjust the middle seat headrest to optimize coverage. **See Photo 16.**

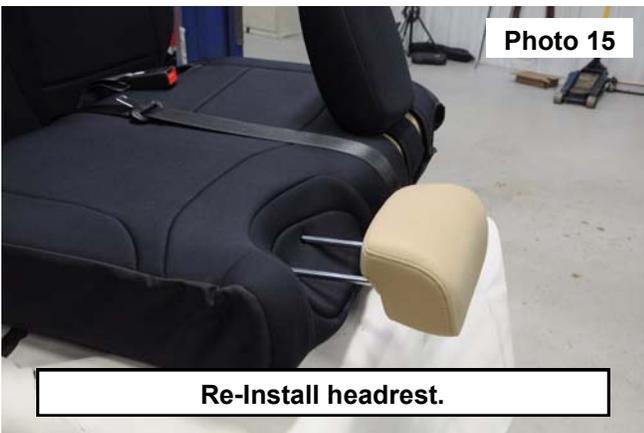

By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable , State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.

